



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**Phase Control SCR**  
 310 Amperes Average  
 1600 Volts

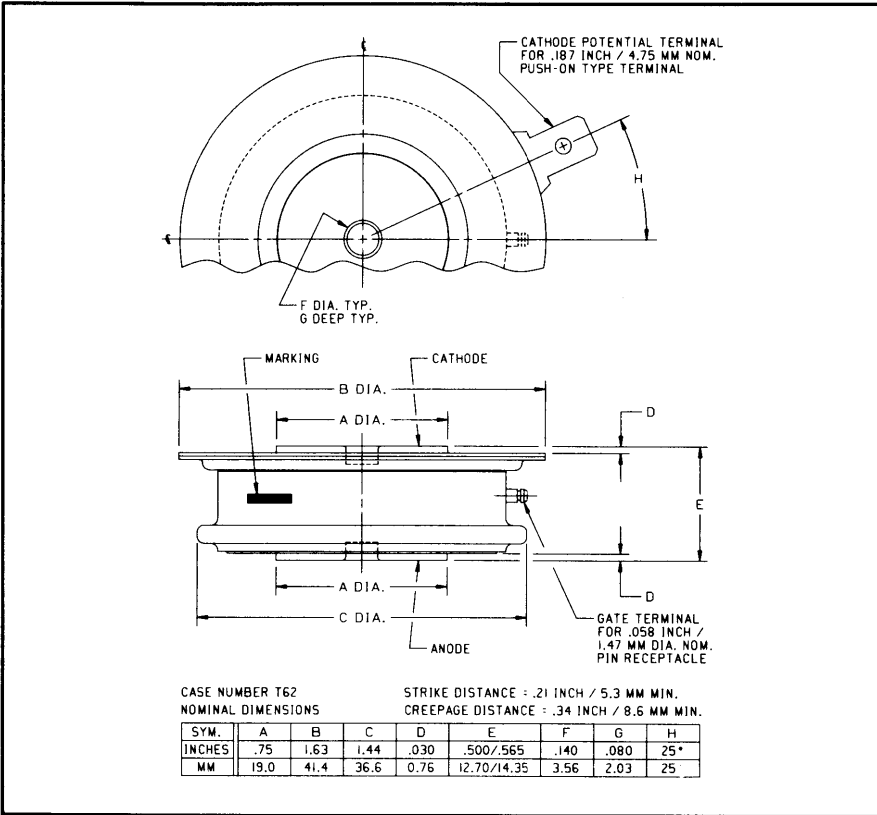

C380\_\_X500 (Outline Drawing)

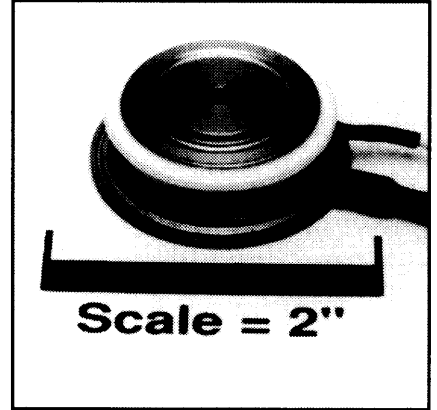

C380\_\_X500 Phase Control SCR  
 310 Amperes Average, 1600 Volts

### Ordering Information:

Select the complete nine digit part number you desire from the table, i.e. C380PMX500 is a 1600 Volt, 310 Ampere Phase Control SCR.

| Type       | Voltage                              |      | Current            |
|------------|--------------------------------------|------|--------------------|
|            | V <sub>DRM</sub><br>V <sub>RRM</sub> | Code | I <sub>T(av)</sub> |
| C380__X500 | 200                                  | B    | 310                |
|            | 400                                  | D    |                    |
|            | 600                                  | M    |                    |
|            | 800                                  | N    |                    |
|            | 1000                                 | P    |                    |
|            | 1200                                 | PB   |                    |
|            | 1400                                 | PD   |                    |
| 1600       | PM                                   |      |                    |

### Description:

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

### Features:

- Low On-State Voltage
- High di/dt
- High dv/dt
- Hermetic Packaging
- Excellent Surge and I<sup>2</sup>t Ratings

### Applications:

- Power Supplies
- Battery Chargers



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

C380\_X500  
 Phase Control SCR  
 310 Amperes Average, 1600 Volts

### Absolute Maximum Ratings

|   | Symbol       | C380_X500   | Units                  |
|---|--------------|-------------|------------------------|
| RMS On-State Current @ $T_C = 83^\circ\text{C}$               | $I_{T(RMS)}$ | 500         | Amperes                |
| Average On-State Current @ $T_C = 83^\circ\text{C}$           | $I_{T(av)}$  | 310         | Amperes                |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz) | $I_{TSM}$    | 5500        | Amperes                |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) | $I_{TSM}$    | 5000        | Amperes                |
| Critical Rate-of-Rise of On-State Current (Non-Repetitive)    | $di/dt$      | 800         | Amperes/ $\mu\text{s}$ |
| Critical Rate-of-Rise of On-State Current (Repetitive)        | $di/dt$      | 500         | Amperes/ $\mu\text{s}$ |
| $I^2t$ (for Fusing), One Cycle at 60Hz                        | $I^2t$       | 125,000     | $\text{A}^2\text{sec}$ |
| Peak Gate Power Dissipation                                   | $P_{GM}$     | 10          | Watts                  |
| Average Gate Power Dissipation                                | $P_{G(av)}$  | 2           | Watts                  |
| Storage Temperature   | $T_{STG}$    | -40 to 150  | $^\circ\text{C}$       |
| Operating Temperature   | $T_J$        | -40 to 125  | $^\circ\text{C}$       |
| Mounting Force  |              | 720 to 880  | lb.                    |
| Mounting Force  |              | 3.2 to 3.92 | kN                     |


### Electrical and Thermal Characteristics

| Characteristics   | Symbol          | Test Conditions   | C380_X500 | Units                        |
|---|-----------------|---|-----------|------------------------------|
| <b>Voltage—Blocking State Maximums</b>                                  |                 |   |           |                              |
| Forward Leakage, Peak   | $I_{DRM}$       | $T_J = 125^\circ\text{C}, V = V_{DRM}$  | 20        | mA                           |
| Reverse Leakage, Peak   | $I_{RRM}$       | $T_J = 125^\circ\text{C}, V = V_{RRM}$  | 20        | mA                           |
| <b>Current—Conducting State Maximums</b>                                |                 |   |           |                              |
| Peak On-State Voltage   | $V_{TM}$        | $T_C = 125^\circ\text{C}, I_{TM} = 1500\text{A}, \text{Duty Cycle} = 0.01\%$  | 1.75      | Volts                        |
| <b>Switching</b>  |                 |   |           |                              |
| Typical Turn-On Delay   | $t_d$           | $T_C = 25^\circ\text{C}, I_T = 100\text{A}, V_{DRM} = \text{rated}.$<br>Gate Supply 10V Open Circuit, 25 $\Omega$ ,<br>0.1 $\mu\text{sec}$ max. rise time | 1         | $\mu\text{sec}$              |
| Min. Critical $dv/dt$ exponential to $V_{DRM}$                          | $dv/dt$         | $T_J = 125^\circ\text{C}, \text{Gate open circuited}.$  | 200       | $\text{V}/\mu\text{sec}$     |
| <b>Thermal</b>  |                 |   |           |                              |
| Maximum Thermal Resistance,<br>double sided cooling<br>Junction to Case | $R_{\theta JC}$ |   | 0.095     | $^\circ\text{C}/\text{Watt}$ |
| Case to Sink, Lubricated  | $R_{\theta CS}$ |   | 0.02      | $^\circ\text{C}/\text{Watt}$ |
| <b>Gate—Maximum Parameters</b>  |                 |   |           |                              |
| Gate Current to Trigger   | $I_{GT}$        | $T_C = 25^\circ\text{C}, V_D = 6\text{V}, R_L = 3 \Omega$   | 150       | mA                           |
| Gate Voltage to Trigger   | $V_{GT}$        | $T_C = -40^\circ\text{C} \text{ to } 125^\circ\text{C}, V_D = 6\text{V}, R_L = 3 \Omega$  | 3.0       | Volts                        |
| Non-Triggering Gate Voltage   | $V_{GDM}$       | $T_J = 125^\circ\text{C}, \text{Rated } V_{DRM}, R_L = 1000 \Omega$   | 0.15      | Volts                        |
| Peak Forward Gate Current   | $I_{GTM}$       |   | 10        | Amperes                      |
| Peak Reverse Gate Voltage   | $V_{GRM}$       |   | 5         | Volts                        |


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**C380\_X500**  
**Phase Control SCR**  
 310 Amperes Average, 1600 Volts


**MAXIMUM ON-STATE CHARACTERISTICS**

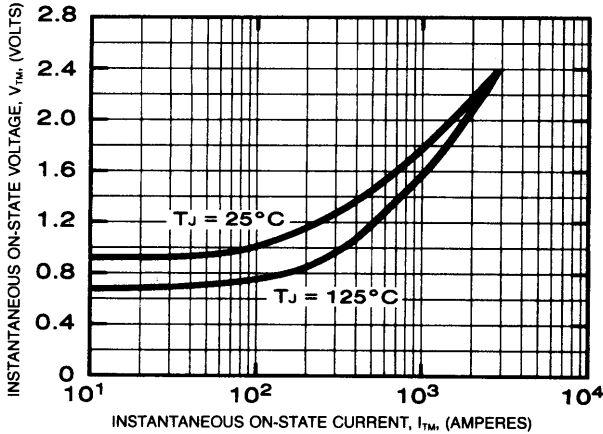


**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)**

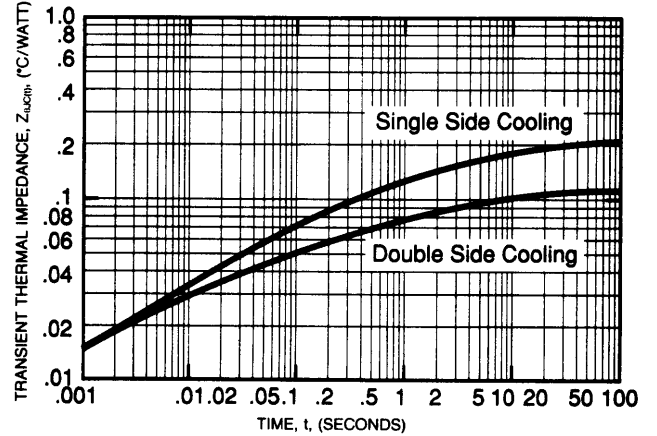


**MAXIMUM ALLOWABLE CASE TEMPERATURE (SINUSOIDAL WAVEFORM)**

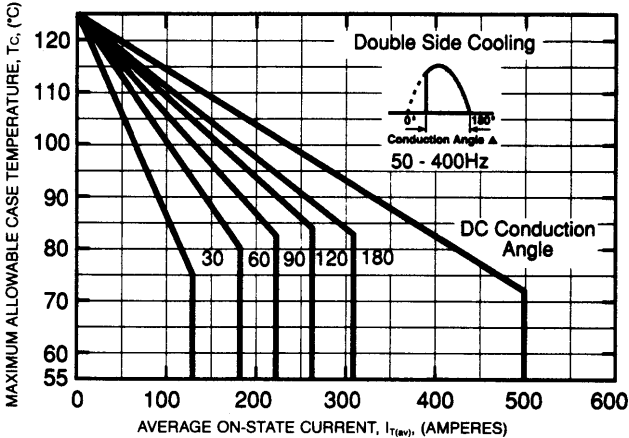


**MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)**

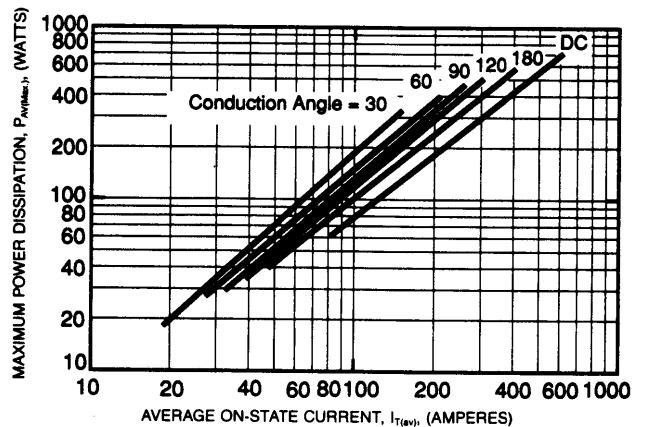

**MAXIMUM ALLOWABLE CASE TEMPERATURE (RECTANGULAR WAVEFORM)**

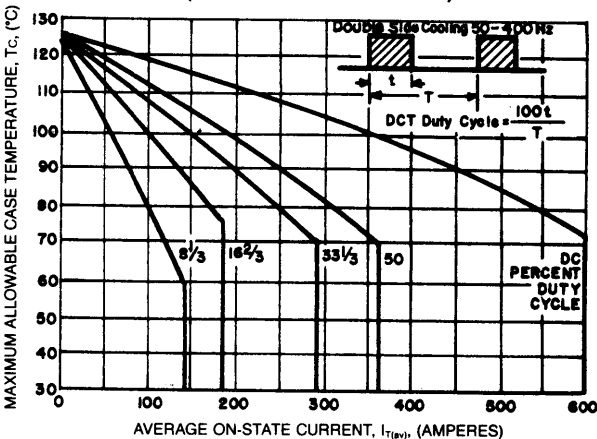


**MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)**

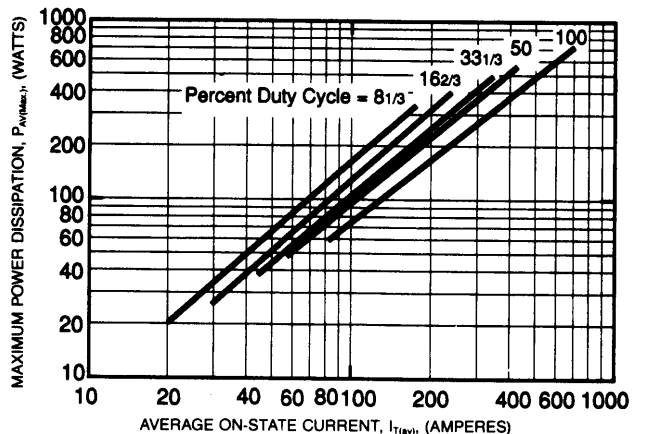


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**C380\_X500**  
**Phase Control SCR**  
 310 Amperes Average, 1600 Volts

**SUB-CYCLE SURGE AND  $I^2t$  RATINGS**  
 (RATED LOAD CONDITIONS)

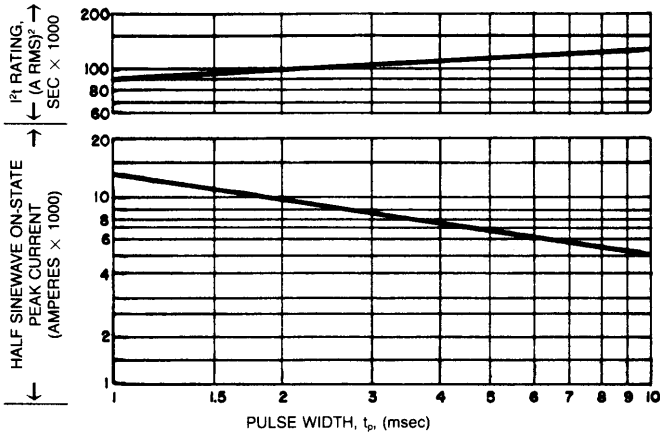

**GATE CHARACTERISTICS**

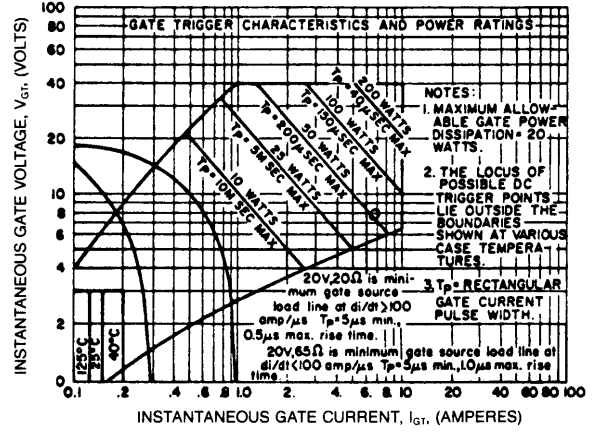

- NOTES:**
1. Maximum allowable gate power dissipation = 20 watts.
  2. THE LOCUS OF POSSIBLE DC TRIGGER POINTS LIE OUTSIDE THE BOUNDARIES SHOWN AT VARIOUS CASE TEMPERATURES.
  3.  $T_p$  = RECTANGULAR GATE CURRENT PULSE WIDTH.